



Ultra High Performance
Omni Fiberglass
868MHz Antenna

3dBi

bbmicrowave.com




Omni Fiberglass Antenna 3dBi 868MHz Tech Specs

Electrical Specifications		Product Picture
RF Antenna Type	Omnidirectional Antenna	
Model	BBM-ANT-ONM-868-3DBI-25	
Frequency	868 MHz	
Gain	3 dBi	
VSWR	1.1 - 1.3	
Impedance	50 Ω	
Polarization	Vertical	
Horizontal Beam-width(0°)	360°	
Vertical Beamwidth(0°)	60±5°	
Connector	N Male	
Max Power	50W	
Radiation Pattern	Omnidirectional	
Lightning Protection	DC Ground	
Mechanical Specifications		Mounting
Dimensions	25x320 mm	
Packaging Size	355 mm (L) x 50 mm (D)	
Packaging Type	individually packed in carton tube box with protective foam inside	
Gross Weight*	0.584 kg	
Operational Humidity	<65%	
Rated Wind Speed	200 km/h	
Radome Material	Fiberglass	
Storage Temperature Range	-40°C +75°C	
Working Temperature Range	-40°C +65°C	
Color	White	
Antenna Form	Single Band	
Mounting	Screw	
RoHS	Compliant	
Applications	SCADA/Utilities, IoT/M2M/LoRa/ISM	

* Gross Weight includes the weight of the antenna and the mounting kit.



Omni Fiberglass Antenna 3dBi 868MHz Antenna Radiation Pattern Test Data

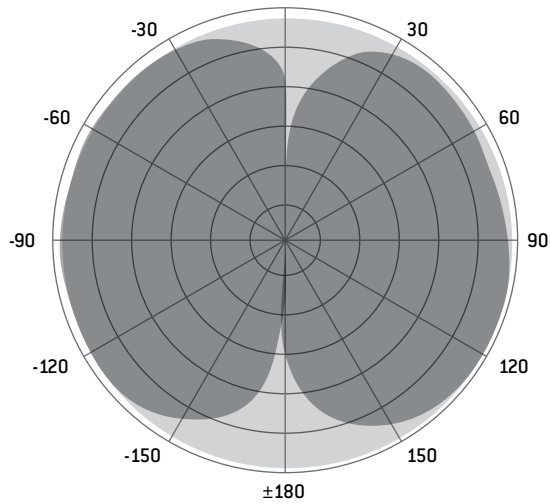

Omni Fiberglass Antenna 3dBi 868MHz Antenna S Parameter Test Data

Trc 1 **S11** SWR 100 mU Ref 1 U Cal

